

STAR

COLORIZED




SPECTRUM®

ACRYLIC PAVEMENT SEALER

Simply Brilliant!



Excellent durability! Spectrum® has been proven as a viable alternative to many traditional pavement coating products.

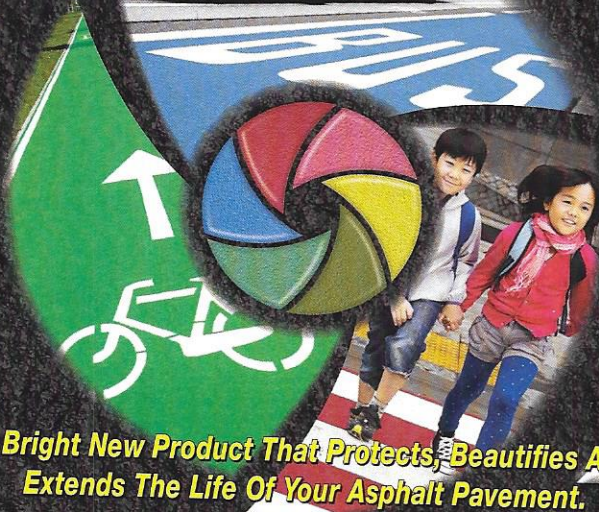

A Bright New Product That Protects, Beautifies And Extends The Life Of Your Asphalt Pavement.

Magnificent color that protects asphalt and concrete surfaces! Spectrum® cures to a vibrant color that will resist fading and weathering with time.



SPECTRUM BRIGHTS



LILY WHITE
Pure Titanium White



LEMON YELLOW
Similar to Pantone 395 Yellow



BIKE LANE GREEN
Similar to Pantone 375 Green



OCEAN BLUE
Similar to Pantone 300 Blue



CONCORD PURPLE
Similar to Pantone Violet



PEPPERMINT PINK
Similar to Pantone 205 Pink



HOT ROD RED
Similar to Pantone 711 Red

SPECTRUM STANDARDS



SKY BLUE
Similar to Pantone 632 Blue



SEA FOAM GREEN
Similar to Pantone 326 Green



FAIRWAY GREEN
Similar to Pantone 364 Green



SALMON ORANGE
Similar to Pantone 165 Orange



MAGENTA
Similar to Pantone 207 Red



COOL GRAY
Similar to Pantone 6 Cool Gray



STANDARD BLACK
Dries to a Rich Black Color

SPECTRUM NATURALS



SAGE GREEN
Similar to Pantone 349 Green



BRICK RED
Similar to Pantone 180 Red



DARK GRAY
Similar to Pantone 430 Gray



SAHARA TAN
Similar to Pantone 728 Brown



LIGHT BROWN
Similar to Pantone 477 Brown



SUEDE BROWN
Similar to Pantone 7610 Brown



CUSTOM COLOR MIX
Custom Colors are Available

STAR SEAL OF FLORIDA INC.

www.starsealf.com

2740 N.W. 55th Court ▲ Ft Lauderdale, FL 33309

Toll Free 954-484-8402



GENERAL DESCRIPTION

STAR SPECTRUM® is a 100% acrylic latex polymer based coating that belongs to a new generation of pavement maintenance products. Built on carefully selected polymers, color fast pigments, minerals, specialty additives and performance boosters, STAR SPECTRUM® has an extraordinary degree of toughness and water repellency. STAR SPECTRUM® forms a tough, durable and flexible coating that protects your pavement from the damaging elements of weather, water penetration and de-icing salts. STAR SPECTRUM® also holds up well against occasional spills of gasoline, oils and many chemicals. STAR SPECTRUM® is a brilliant way to add vibrant color to any paved surface; for protection, safety, traffic separation and for corporate identity and visibility!

STAR SPECTRUM® COLORS

Lily White, Sky Blue, Ocean Blue, Purple, Sea Foam Green, Sage Green, Fairway Green, Lemon Yellow, Salmon Orange, Brick Red, Magenta, Peppermint Pink, Hot Rod Red, Tan, Cool Gray, Bike Lane Green and Black. The ability to mix custom colors is available.

OUTSTANDING PROPERTIES

- **Excellent Durability** – STAR SPECTRUM® has been proven as a viable alternative to many traditional pavement coating products. Effective on both asphalt pavement and concrete surfaces.
- **Superior Flexibility** – Ability to bridge minor surface (non-working) cracks in the pavement to eliminate water penetration and extend the life of asphalt surfaces.
- **Magnificent Color that Protects** – Cures to a beautiful brilliant color that resists fading or weathering with time. Industry leading bright vibrant colors, a first of its kind.
- **Non-Hazardous in Application, Handling and Storage** – Water based, safe for playgrounds and use where human contact is unavoidable. Easy to apply, clean up and store.

RECOMMENDED USES

STAR SPECTRUM® is recommended for both asphalt pavements and concrete surfaces that have low to medium traffic patterns; home driveways, restaurants, strip malls, bike lanes, school play areas, golf courses, theme parks, custom markings on commercial parking lots, airfield markings and many more.

MIX DESIGN RECOMMENDATIONS

Important - All mix designs must include clean, quartz, angular sand.

	US	METRIC
STAR SPECTRUM®	100 Gal.	100 Liters
Water (Clean, Potable)	5 Gal.	5 Liters
Sand 50-70 AFS*	300-500 Lbs.	36-60 Kg.

* Crushed slag (i.e. Black Beauty) shall not be used.

APPLICATION RATES

Must be applied to structurally sound pavements. Do not apply over chip seal or gilsonite sealed surfaces. The application rates shall be dictated by the traffic pattern and usage.

1 For Pedestrian and Low Traffic Areas Apply One (1) Coat:

- a) STAR SPECTRUM® (Concentrated) - the total coverage rate of 0.09 - 0.10 Gal./Sq. Yd. or 90 - 100 Sq. Ft./Gal. (2.2 - 2.45 Sq. Meter/Liter).
- b) Mixed STAR SPECTRUM® with 5% Water and 4 Lbs. Sand/Gal. - 0.11 - 0.12 Gal./Sq. Yd. or 75 - 82 Sq. Ft./Gal. (1.83 - 2.00 Sq. Meter/Liter).

2 For Moderate Traffic Areas Apply Two (2) Coats:

- a) STAR SPECTRUM® (Concentrated) - the total coverage rate of 0.14 - 0.16 Gal./Sq. Yd. or 56 - 64 Sq. Ft./Gal. (1.37 - 1.57 Sq. Meter/Liter).
- b) Mixed STAR SPECTRUM® with 5% Water and 4 Lbs. Sand/Gal. - 0.17 - 0.20 Gal./Sq. Yd. or 45 - 53 Sq. Ft./Gal. (1.10 - 1.30 Sq. Meter/Liter).

IMPORTANT WEATHER LIMITATIONS

- Surface and air temperature should be a min. 50° F (10° C) and rising.
- Do not apply on rainy, foggy, or extremely humid days, or when rain is in the forecast within 24 hours.
- If the pavement temperature is over 100° (38°C) dampen the pavement with a fine mist of water to facilitate even spreading. Do not allow water to puddle on the surface.

APPLICATION TOOLS

- Use conventional tools; Brush, rubber squeegee or spray rig.
- Clean up with Water. Do not discard washings in the bodies of water or down sewer drains.
- Dried sealer on tools - Wire brushing, scarping and peeling.
- Keep stored containers sealed tightly.

CURING TIME

Cure time will vary according to temperature and humidity at the time of application. Insufficiently cured films wear prematurely. Lower temperatures, high humidity and lack of direct sunlight will prolong the cure time. Whereas higher temperatures, lower humidity and direct sunlight accelerate the cure process. If a second coat is to be applied, allow the first coat to dry sufficiently to withstand light vehicular and pedestrian traffic without damaging or scuffing the coating. After the application of the last coat, allow the coating to cure at least 20-24 hours under good drying conditions.

SPECIAL INSTRUCTIONS

IMPORTANT: Polished aggregate in certain pavement sections (entrance/exits, high traffic lanes, etc.) may pose a special challenge for the proper bonding of STAR SPECTRUM® to the pavement. The use of STAR® SPECTRA-PRIME™ is recommended for such situations. STAR® SPECTRA-PRIME™ is a specialty water based primer that creates an affirmative bond between the polished aggregate and STAR SPECTRUM®. Apply STAR® SPECTRA-PRIME™ at 0.04-0.05 gal/sq. yard or 180-225 sq. ft./gallon (4.4-5.5 sq. meter/liter).

Apply only on unsealed asphalt or surfaces previously sealed with either Asphalt Emulsion or Refined Tar based sealers. DO NOT mix STAR SPECTRUM® with other AE or RTS based sealcoatings. Do not apply over surfaces sealed with gilsonite and other solvent based seal coatings. New asphalt pavements must be allowed to cure at least 90 days in hot weather. Concrete surfaces must be etched with muriatic acid and primed with STAR® SPECTRA-PRIME™ prior to application.

CAUTIONS

KEEP FROM FREEZING / KEEP OUT OF REACH OF CHILDREN

Wear gloves and protective clothing. In case of contact, flush skin or eyes immediately with fresh water. If the product gets in the mouth or eyes see a physician immediately. Consult a Safety Data Sheet for details.

PACKAGING & AVAILABILITY

5-Gallon plastic pails, 55-gallon drums and 275-gallon plastic totes at all STAR plant locations.

WARRANTY & DISCLAIMER The suggestions and related data contained on these pages are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. STAR® SPECTRUM™ colors as shown on this brochure are an example only of the applied coating and are not intended to be used as an exact representation of the final dried colors. S.T.A.R., Inc. will not be responsible for any indirect or consequential damages. We will either replace or refund the purchase price in the event the products are proved to be defective, at our option.



2740 N. W. 55th Court
Ft. Lauderdale, FL 33309
954-484-8402

www.starsealfl.com